

# ENGINE

SELECTION GUIDE



For Earth, For Life

**Kubota**

# KUBOTA INDUSTRIAL ENGINES - DIESEL

## EA SERIES (HORIZONTAL)

Model	Emission Regulation		Cyl.	Combust. System	Aspiration	ATU	Rated Speed	Gross Intermittent		Net Intermittent		Net Continuous		Max. Torque	Torque Speed	Bore	Stroke	Displacement	Without ATU			With ATU			Dry Weight
	EPA / CARB Tier 4	EU Stage V						kW	HP	kW	HP	kW	HP						Nm (lb-ft)	RPM	mm (in)			mm (in)	
	rpm	kW					HP	kW	HP	kW	HP	Nm (lb-ft)	RPM	L (cu.in)			mm (in)			kg (lb)					
EA330-E4	✓	✓	1	IDI	Naturally Aspirated	-	3000	-	-	5.15	6.91	4.4	5.9	17.65 (13.02)	2000	77.0 (3.03)	70.0 (2.76)	0.325 (19.8)	312 (12.3)	566 (22.3)	457 (18.0)	-	-	-	54 (120)

SAE J1349 Net Intermittent

## OC SERIES (OIL AIR-COOLED)

OC60-E4	✓	✓	1	IDI	Naturally Aspirated	-	3600	-	-	4.5	6.0	4.1	5.5	13.2 (9.7)	2000-2600	72.0 (2.83)	68.0 (2.68)	0.276 (16.8)	403 (15.9)	461 (18.1)	458 (18.0)	-	-	-	38 (84)
OC95-E4	✓	✓	1	IDI	Naturally Aspirated	-	3600	-	-	7.0	9.4	6.25	8.38	21.6 (15.9)	2300	83.0 (3.27)	77.0 (3.03)	0.416 (25.4)	451 (17.8)	503 (19.8)	501 (19.7)	-	-	-	56 (120)

SAE J1349 Net Intermittent

## SUPER MINI SERIES

Z482-E4	✓	✓	2	IDI	Naturally Aspirated	-	3600	9.9	13.3	9.3	12.5	8.1	10.8	29.7 (21.9)	2600	67.0 (2.64)	68.0 (2.68)	0.479 (29.23)	338 (13.3)	386 (15.2)	564 (22.2)	-	-	-	53 (117)
Z602-E4	✓	✓	2	IDI	Naturally Aspirated	-	3200	10.8	14.5	10.1	13.5	8.8	11.8	38.0 (28.0)	2400	72.0 (2.83)	73.6 (2.90)	0.599 (36.55)	351 (13.8)	401 (15.8)	544 (21.4)	-	-	-	57 (120)
							3600	12.5	16.8	11.6	15.6	10.1	13.5	37.8 (27.9)	2600				407 (16.0)	386 (15.2)	564 (22.2)				63 (139)
D722-E4	✓	✓	3	IDI	Naturally Aspirated	-	3600	14.9	20.0	14.0	18.8	12.2	16.3	45.8 (33.8)	2600	67.0 (2.64)	68.0 (2.68)	0.719 (43.88)	407 (16.0)	386 (15.2)	564 (22.2)	-	-	-	63 (139)
D902-E4	✓	✓	3	IDI	Naturally Aspirated	-	3200	16.1	21.6	15.4	20.7	13.4	17.9	56.1 (41.3)	2400	72.0 (2.83)	73.6 (2.90)	0.898 (54.80)	434 (17.1)	401 (15.8)	544 (21.4)	-	-	-	72 (159)
							3600	18.5	24.8	17.5	23.5	15.2	20.4	56.1 (41.4)	2600				434 (17.1)	412 (16.2)	544 (21.4)				75 (165)
D902-TE4	✓	✓	3	IDI	Turbocharged	-	3200	18.5	24.8	-	-	-	-	72.2 (53.2)	2400	72.0 (2.83)	73.6 (2.90)	0.898 (54.80)	434 (17.1)	412 (16.2)	544 (21.4)	-	-	-	75 (165)
D902-K	✓	✓	3	TVCR	Naturally Aspirated	-	3600	18.5	24.8	-	-	-	-	56.1 (41.4)	2600	72.0 (2.83)	73.6 (2.90)	0.898 (54.80)	434 (17.1)	401 (15.8)	544 (21.4)	-	-	-	72 (159)

## 05 SERIES

D1005-E4	✓	✓	3	IDI	Naturally Aspirated	-	3000	17.5	23.5	16.8	22.5	14.6	19.6	62.8 (46.3)	2200	76.0 (2.99)	73.6 (2.90)	1.001 (61.08)	480 (18.9)	396 (15.6)	605 (23.8)	-	-	-	93 (205)
							3200	18.5	24.8	17.7	23.7	15.4	20.6	62.2 (45.9)	2400										
D1105-E4	✓	✓	3	IDI	Naturally Aspirated	-	3000	18.5	24.8	17.8	23.9	15.5	20.7	71.5 (52.7)	2200	78.0 (3.07)	78.4 (3.09)	1.123 (68.53)	480 (18.9)	396 (15.6)	605 (23.8)	-	-	-	93 (205)
D1105-K	✓	✓	3	TVCR	Naturally Aspirated	-	3000	18.5	24.8	-	-	-	-	72.4 (53.4)	2200	78.0 (3.07)	78.4 (3.09)	1.123 (68.53)	481 (18.9)	380 (15.0)	595 (23.4)	-	-	-	93 (205)
D1305-E4	✓	✓	3	IDI	Naturally Aspirated	-	2600	18.5	24.8	17.9	24	15.5	20.8	80.1 (59.1)	1700	78.0 (3.07)	88.0 (3.46)	1.261 (76.95)	480 (18.9)	396 (15.6)	590 (23.2)	-	-	-	95 (209)
V1505-E4	✓	✓	4	IDI	Naturally Aspirated	-	2300	18.5	24.8	17.7	23.7	15.4	20.6	92.6 (68.3)	1700	78.0 (3.07)	78.4 (3.09)	1.498 (91.41)	565 (22.2)	396 (15.6)	607 (23.9)	-	-	-	110 (243)
V1505-CR-TE5	✓	✓	4	DI	Turbocharged	DOC + DPF	3000	33.0	44.3	31.3	42.0	27.2	36.5	118.6 (87.5)	2000	78.0 (3.07)	78.4 (3.09)	1.498 (91.41)	-	-	-	766 (30.2)	466 (18.3)	686 (27.0)	169 (373)

## 03 SERIES

D1703-M-DI-E4	✓	✓	3	IDI	Naturally Aspirated	-	2200	18.5	24.8	17.1	24.1	-	-	97.4 (71.8)	1500	87.0 (3.43)	92.4 (3.64)	1.647 (100.5)	547 (21.5)	495 (19.5)	679 (26.7)	-	-	-	148 (326)
D1803-CR-TIE4	✓		3	DI	Turbocharged + Turbo After Cooler	DOC	2700	37.0	49.6	35.3	47.3	30.7	41.1	150.5 (110.0)	1600	87.0 (3.43)	102.4 (4.031)	1.826 (111.4)	551 (21.7)	536 (21.1)	728 (28.7)	746 (29.4)	536 (21.1)	728 (28.7)	195 (430)
D1803-CR-E5	✓	✓	3	DI	Naturally Aspirated	DOC + DPF	2700	28.0	37.5	26.8	35.9	23.3	31.2	115.0 (85.4)	1600	87.0 (3.43)	102.4 (4.031)	1.826 (111.4)	551 (21.7)	536 (21.1)	711 (28.0)	746 (29.4)	536 (21.1)	721 (28.4)	185 (407)
D1803-CR-TE5	✓	✓	3	DI	Turbocharged	DOC + DPF	2700	37.0	49.6	35.3	47.3	30.7	41.1	150.5 (110.0)	1600	87.0 (3.43)	102.4 (4.031)	1.826 (111.4)	551 (21.7)	536 (21.1)	742 (29.2)	746 (29.4)	536 (21.1)	742 (29.2)	196 (432)
D1803-CR-TIE5*	✓	✓	3	DI	Turbocharged + Turbo After Cooler	DOC + DPF	2700	42.0	56.3	-	-	-	-	182.7 (134.8)	1600	87.0 (3.43)	102.4 (4.031)	1.826 (111.4)	551 (21.7)	536 (21.1)	726 (28.6)	746 (29.4)	536 (21.1)	745 (29.3)	204 (450)
V2403-CR-TIE4	✓		4	DI	Turbocharged + Turbo After Cooler	DOC	2700	48.6	65.2	45.6	61.2	39.6	53.1	198.5 (146.4)	1600	87.0 (3.43)	102.4 (4.031)	2.434 (148.5)	646 (25.4)	540 (21.3)	728 (28.7)	842 (33.1)	540 (21.3)	728 (28.7)	232 (511)
V2403-CR-E5	✓	✓	4	DI	Naturally Aspirated	DOC + DPF	2700	37.4	50.2	34.6	46.4	30.1	40.3	159.8 (117.9)	1600	87.0 (3.43)	102.4 (4.031)	2.434 (148.5)	646 (25.4)	540 (21.3)	711 (28.0)	842 (33.1)	540 (21.3)	727 (28.6)	221 (487)
V2403-CR-TE5	✓	✓	4	DI	Turbocharged	DOC + DPF	2700	48.6	65.2	45.6	61.2	39.6	53.1	198.5 (146.4)	1600	87.0 (3.43)	102.4 (4.031)	2.434 (148.5)	646 (25.4)	540 (21.3)	735 (28.9)	842 (33.1)	540 (21.3)	735 (28.9)	233 (514)
V2403-CR-TIE5*	✓	✓	4	DI	Turbocharged + Turbo After Cooler	DOC + DPF	2700	55.4	74.3	52.9	70.9	45.9	61.6	248.7 (183.4)	1600	87.0 (3.43)	102.4 (4.031)	2.434 (148.5)	646 (25.4)	540 (21.3)	726 (28.6)	866 (34.1)	540 (21.3)	753 (29.6)	245 (540)

\*High Torque, High Horsepower

# KUBOTA INDUSTRIAL ENGINES - DIESEL

## 07 SERIES

Model	Emission Regulation		Cyl.	Combust. System	Aspiration	ATU	Rated Speed	Gross Intermittent			Net Intermittent			Net Continuous		Max. Torque	Torque Speed	Bore	Stroke	Displacement	Without ATU			With ATU			Dry Weight				
	EPA / CARB Tier 4	EU Stage V						rpm	kW	HP	kW	HP	kW	HP	Nm (lb-ft)						RPM	mm (in)	L (cu.in)	L	W	H		L	W	H	kg (lb)
V2607-CR-E5	✓	✓	4	DI	Naturally Aspirated	DOC + DPF	2700	42.0	56.3	40.0	53.6	34.7	46.5	174.1 (128.4)	1600	87.0 (3.43)	110.0 (4.331)	2.615 (159.6)	623 (24.5)	522 (20.6)	700 (27.6)	833 (32.8)	522 (20.6)	723 (28.5)	267 (589)						
V2607-CR-TIE4	✓		4	DI	Turbocharged + Turbo After Cooler	DOC	2700	53.0	71.1	49.9	66.9	43.3	58.1	225.0 (166.0)	1600	87.0 (3.43)	110.0 (4.331)	2.615 (159.6)	623 (24.5)	522 (20.6)	699 (27.5)	821 (32.3)	522 (20.6)	723 (28.5)	259 (571)						
V2607-CR-TE5	✓	✓	4	DI	Turbocharged	DOC + DPF	2700	53.0	71.1	49.9	66.9	43.3	58.1	225.0 (166.0)	1600	87.0 (3.43)	110.0 (4.331)	2.615 (159.6)	623 (24.5)	522 (20.6)	701 (27.6)	833 (32.8)	522 (20.6)	723 (28.5)	272 (600)						
V2607-CR-TIE5*	✓	✓	4	DI	Turbocharged + Turbo After Cooler	DOC + DPF	2700	55.4	74.3	52.9	70.9	45.9	61.6	269.0 (198.4)	1600	87.0 (3.43)	110.0 (4.331)	2.615 (159.6)	623 (24.5)	522 (20.6)	699 (27.5)	833 (32.8)	522 (20.6)	723.0 (28.5)	272 (600)						
V3307-CR-TIE4	✓		4	DI	Turbocharged + Turbo After Cooler	DOC	2600	55.4	74.3	52.9	70.9	45.9	61.6	265 (195.5)	1500	94.0 (3.70)	120.0 (4.724)	3.331 (203.3)	655 (25.8)	555 (21.9)	730 (28.7)	835 (32.9)	555 (21.9)	744 (29.3)	295 (650)						
V3307-CR-TE5	✓	✓	4	DI	Turbocharged	DOC + DPF	2600	55.4	74.3	52.9	70.9	45.9	61.6	265.0 (195.5)	1500	94.0 (3.70)	120.0 (4.724)	3.331 (203.3)	655 (25.8)	561 (22.1)	752 (29.6)	856 (33.7)	561 (22.1)	752 (29.6)	305 (672)						
V3307-CR-TIE5**	✓	✓	4	DI	Turbocharged + Turbo After Cooler	DOC + DPF	2600	55.4	74.3	52.9	70.9	45.9	61.6	335.0 (247.1)	1400	94.0 (3.70)	120.0 (4.724)	3.331 (203.3)	655 (25.8)	557 (21.9)	730 (28.7)	856 (33.7)	557 (21.9)	749 (29.5)	299 (659)						

## V3 SERIES

V3800-TIE4	✓		4	DI	Turbocharged + Turbo After Cooler	DOC	2200	55.4	74.3	52.4	70.3	45.5	61.0	310 (228.7)	1500	100.0 (3.937)	120.0 (4.724)	3.769 (230.0)	699 (27.5)	617 (24.3)	837 (33.0)	845 (33.3)	617 (24.3)	852 (33.5)	324 (714)
V3800-CR-TE5	✓	✓	4	DI	Turbocharged	DOC + DPF	2200	55.4	74.3	52.2	70.0	45.3	60.8	310 (228.7)	1500	100.0 (3.937)	120.0 (4.724)	3.769 (230.0)	699 (27.5)	581 (22.9)	852 (33.5)	845 (33.3)	581 (22.9)	852 (33.5)	325 (717)
V3800-TIE5	✓	✓	4	DI	Turbocharged + Turbo After Cooler	DOC+DPF + SCR	2600	86.4	115.9	82.3	110.4	71.5	95.9	385 (284.0)	1500	100.0 (3.937)	120.0 (4.724)	3.769 (230.0)	699 (27.5)	617 (24.3)	837 (33.0)	845 (33.3)	653 (25.7)	1191 (46.89)	400 (882)
V3800-TIE5H*	✓	✓	4	DI	Turbocharged + Turbo After Cooler	DOC+DPF + SCR	2400	96.4	130.9	-	-	-	-	446.6 (324.5)	1800	100.0 (3.937)	120.0 (4.724)	3.769 (230.0)	699 (27.5)	617 (24.3)	837.0 (33.0)	845 (33.3)	653 (25.7)	1191 (46.89)	400 (882)

## 09 SERIES

V5009-TIE5	✓	✓	4	DI	Turbocharged + Turbo After Cooler	DOC+DPF + SCR	2200	157.3	210.9	-	-	-	-	883.1 (651.3)	1500-1600	110.0 (4.331)	132.0 (5.197)	5.018 (306.2)	898 (35.4)	656 (25.8)	978 (38.5)	-	-	-	620 (1,366)
------------	---	---	---	----	-----------------------------------	---------------	------	-------	-------	---	---	---	---	---------------	-----------	---------------	---------------	---------------	------------	------------	------------	---	---	---	-------------

\*High Torque, High Horsepower

\*\*High Torque



# KUBOTA INDUSTRIAL ENGINES - SPARK IGNITED

Model	Fuel	Dual Fuel	Emission Regulation								Cyl.	Aspiration	ATU	Rated Speed	Gross Intermittent		Net Intermittent		Net Continuous		Max. Torque	Torque Speed	Bore	Stroke	Displacement	Without ATU			Dry Weight
			EU Stage V Ready	EU Stage V	EPA Tier 2	EPA Phase 3 CARB	Tier 3 CARB	Phase 3 CARB	Phase 4	rpm					kW	HP	kW	HP	kW	HP						Nm (lb-ft)	RPM	mm (in)	
			mm (in)	L (cu.in)	mm (in)	kg (lb)																							
WG1605-N-E3	N		✓	✓		✓				4	Naturally Aspirated	Three-way Catalyst	3600	38.4	51.5	34.8	46.7	27.8	37.3	110.1 (81.3)	2600	79.0 (3.11)	78.4 (3.09)	1.537 (93.79)	566 (22.3)	459 (18.1)	692 (27.2)	121 (267)	
WG1903-G	G		✓	✓		✓				3	Naturally Aspirated	Three-way Catalyst	2700	35.0	46.9	-	-	-	-	133.0 (98.1)	2700	88.0 (3.465)	102.4 (4.031)	1.868 (114.0)	551 (21.7)	534 (21.0)	701 (27.6)	165 (364)	
WG1903-GL	G	DF	✓	✓		✓				3	Naturally Aspirated	Three-way Catalyst	2700	35.0	46.9	-	-	-	-	133.0 (98.1)	1800	88.0 (3.465)	102.4 (4.031)	1.868 (114.0)	551 (21.7)	534 (21.0)	701 (27.6)	167 (368)	
	-															-	-	-	140.0 (103.0)										
WG1903-L-LM	L		✓	✓		✓				3	Naturally Aspirated	Three-way Catalyst	2400	32.6	43.7	-	-	-	-	140.0 (103.0)	1400	88.0 (3.465)	102.4 (4.031)	1.868 (114.0)	551 (21.7)	549 (21.6)	716 (28.2)	172 (380)	
WG1903-N	N		✓	✓		✓				3	Naturally Aspirated	Three-way Catalyst	2700	32.5	43.6	-	-	-	-	132 (97.4)	1200	88.0 (3.465)	102.4 (4.031)	1.868 (114.0)	551 (21.7)	534 (21.0)	701 (27.6)	166 (366)	
WG2503-G-E3	G		✓	✓		✓				4	Naturally Aspirated	Three-way Catalyst	2700	45.5	61.0	41.0	55.0	34.9	46.7	171.1 (126.1)	1800	88.0 (3.46)	102.4 (4.031)	2.491 (152.0)	646 (25.4)	509 (20.0)	761 (30.0)	195 (430)	
WG2503-GL-E3	G	DF	✓	✓		✓				4	Naturally Aspirated	Three-way Catalyst	2700	45.5	61.0	41.0	55.0	34.9	46.7	171.0 (126.1)	1800	88.0 (3.46)	102.4 (4.031)	2.491 (152.0)	646 (25.4)	509 (20.0)	761 (30.0)	197 (434)	
	178.0 (131.3)																			1400									
WG2503-L-E3	L		✓	✓		✓				4	Naturally Aspirated	Three-way Catalyst	2700	46.0	61.7	41.5	55.6	35.3	47.3	178.0 (131.3)	1400	88.0 (3.46)	102.4 (4.031)	2.491 (152.0)	646 (25.4)	509 (20.0)	761 (30.0)	196 (432)	
WG2503-N-E3	N		✓	✓		✓				4	Naturally Aspirated	Three-way Catalyst	2700	42.4	56.8	38.0	51.0	32.3	43.3	160.0 (118.0)	1200	88.0 (3.46)	102.4 (4.031)	2.491 (152.0)	646 (25.4)	509 (20.0)	761 (30.0)	196 (432)	
WG2503-LN-E3	L	DF								4	Naturally Aspirated	Three-way Catalyst	2700	46.0	61.7	41.5	55.6	35.3	47.3	173.7 (128.1)	1400	88.0 (3.46)	102.4 (4.031)	2.491 (152.0)	759.2 (29.9)	524.8 (20.7)	760.9 (30.0)	196 (432)	
	158.0 (117.0)																			1200									
WG3800-G-E3	G		✓	✓		✓				4	Naturally Aspirated	Three-way Catalyst	2600	65.0	87.1	57.8	77.5	49.1	65.8	256.0 (188.9)	2600	100.0 (3.937)	120.0 (4.724)	3.769 (230.0)	700 (27.6)	579 (22.8)	799 (31.5)	288 (635)	
WG3800-G-E3	G		✓	✓		✓				4	Naturally Aspirated	Three-way Catalyst	2600	55.4	74.3	-	-	-	-	256.0 (188.9)	1400	100.0 (3.937)	120.0 (4.724)	3.769 (230.0)	700 (27.6)	576 (22.8)	799 (31.5)	288 (635)	

WG3800-GL-E3	G	DF		✓		✓		4	Naturally Aspirated	Three-way Catalyst	2600	65.0	87.1	57.8	77.5	49.1	65.8	256.0 (188.9)	1200	100.0 (3.937)	120.0 (4.724)	3.769 (230.0)	700 (27.6)	579 (22.8)	799 (31.5)	288 (635)
	L												68.0	91.1	60.4	80.9	51.3	68.8								
WG3800-GL-E3	G	DF		✓	✓		✓	4	Naturally Aspirated	Three-way Catalyst	2600	55.4	74.3	-	-	-	-	256.0 (188.9)	1400	100.0 (3.937)	120.0 (4.724)	3.769 (230.0)	700 (27.6)	579 (22.8)	799 (31.5)	288 (635)
	L												280.0 (206.5)													
WG3800-L-E3	L		✓		✓		✓	4	Naturally Aspirated	Three-way Catalyst	2600	70.0	93.9	62.2	83.3	52.9	70.8	290.0 (213.9)	1200	100.0 (3.937)	120.0 (4.724)	3.769 (230.0)	700 (27.6)	579 (22.8)	799 (31.5)	288 (635)
WG3800-L-E3	L			✓	✓		✓	4	Naturally Aspirated	Three-way Catalyst	2600	55.4	74.3	-	-	-	-	290.0 (213.9)	1200	100.0 (3.937)	120.0 (4.724)	3.769 (230.0)	700 (27.6)	579 (22.8)	799 (31.5)	288 (635)
WG3800-N-E3	N		✓		✓		✓	4	Naturally Aspirated	Three-way Catalyst	2600	65.0	87.2	57.8	77.5	49.1	65.8	269.0 (198.4)	2600	100.0 (3.937)	120.0 (4.724)	3.769 (230.0)	700 (27.6)	579 (22.8)	799 (31.5)	288 (635)
WG3800-N-E3	N			✓	✓		✓	4	Naturally Aspirated	Three-way Catalyst	2600	55.4	74.3	-	-	-	-	269.0 (198.4)	1200	100.0 (3.937)	120.0 (4.724)	3.769 (230.0)	700 (27.6)	579 (22.8)	799 (31.5)	288 (635)
WG3800-LN-E3	L	DF						4	Naturally Aspirated	Three-way Catalyst	2600	70.0	93.8	62.2	83.3	52.9	70.8	282.5 (208.4)	1200	100.0 (3.94)	120.0 (4.72)	3.769 (230.0)	834.9 (32.9)	595.41 (23.4)	825.0 (32.5)	305 (67.2)
	N												65.0	87.1	57.8	77.5	49.1	65.8								

# KUBOTA GENERATOR ENGINES - DIESEL

## SUPER MINI SERIES

Model	EPA/CARB Tier 4	Cyl.	Combust. System	Aspiration	ATU	Standby		Continuous		Frequency	Rated Speed	Bore	Stroke	Displacement	Without ATU			With ATU			Dry Weight					
						kW	HP	kW	HP						HZ	RPM	mm (in)	L (cu.in)	L	W		H	L	W	H	kg (lb)
						mm (in)																				
<b>Z482-E4</b>	✓	2	IDI	Naturally Aspirated	-	4.2	5.6	3.8	5.1	60	1800	67.0 (2.64)	68.0 (2.68)	0.479 (29.23)	436 (17.2)	412 (16.2)	553 (21.8)	-	-	-	78 (172.0)					
<b>Z482-E4</b>	✓	2	IDI	Naturally Aspirated	-	8.9	11.9	8.1	10.9	60	3600	67.0 (2.64)	68.0 (2.68)	0.479 (29.23)	413 (16.3)	386 (15.2)	564 (21.2)	-	-	-	78 (172.0)					
<b>D722-E4</b>	✓	3	IDI	Naturally Aspirated	-	13.3	17.8	12.2	16.4	60	3600	67.0 (2.64)	68.0 (2.68)	0.719 (43.88)	485 (19.1)	386 (15.2)	564 (21.2)	-	-	-	88 (194.0)					

## O5 SERIES

<b>D1005-E4BG</b>	✓	3	IDI	Naturally Aspirated	-	9.8	13.1	8.7	11.7	60	1800	76.0 (2.99)	73.6 (2.90)	1.001 (61.08)	516 (20.3)	391 (15.4)	605 (23.8)	-	-	-	110 (242.0)
<b>D1105-E4BG</b>	✓	3	IDI	Naturally Aspirated	-	11.5	15.4	10.1	13.5	60	1800	78.0 (3.07)	78.4 (3.09)	1.123 (68.53)	516 (20.3)	391 (15.4)	605 (23.8)	-	-	-	110 (242.0)
<b>D1305-E4BG</b>	✓	3	IDI	Naturally Aspirated	-	13.1	17.6	11.6	15.6	60	1800	78.0 (3.07)	88.0 (3.46)	1.261 (76.95)	516 (20.3)	396 (15.6)	590 (23.2)	-	-	-	112 (247.0)
<b>V1505-E4BG</b>	✓	4	IDI	Naturally Aspirated	-	15.1	20.2	13.4	18.0	60	1800	78.0 (3.07)	78.4 (3.09)	1.498 (91.41)	601 (23.7)	391 (15.4)	607 (23.9)	-	-	-	127 (280.0)

## O3 SERIES

<b>D1503-M-E4BG</b>	✓	3	IDI	Naturally Aspirated	-	16.2	21.7	15.1	20.2	60	1800	83.0 (3.27)	92.4 (3.64)	1.499 (91.47)	574 (22.6)	481 (18.9)	643 (25.3)	-	-	-	170 (374.0)
<b>D1803-CR-TI-BG</b>	✓	3	DI	Turbocharged + Turbo After Cooler	DOC	24.2	32.4	20.2	27.1	60	1800	87.0 (3.43)	102.4 (4.031)	1.826 (111.40)	574 (22.6)	536 (21.1)	728 (28.7)	746 (29.4)	536 (21.1)	745 (29.3)	213 (469.0)
<b>V2403-CR-TI-E4BG</b>	✓	4	DI	Turbocharged + Turbo After Cooler	DOC	33.6	45.1	30.6	41.0	60	1800	87.0 (3.43)	102.4 (4.031)	2.434 (148.50)	669 (26.3)	549 (21.6)	728 (28.7)	842 (33.1)	549 (21.6)	745 (29.3)	250 (551.0)

Kubota Generator Engines - Diesel

Net Stand-by: SAE J1349

Net Continuous: SAE J1349




# KUBOTA GENERATOR ENGINES - SPARK IGNITED

## WG SERIES


Model	Fuel	Emissions Regulations		Cyl.	Aspiration	Standby		Continuous		Frequency	Rated Speed	Bore	Stroke	Displacement	Without ATU			Dry Weight
		EPA Tier 2	CARB Tier 3			kW	HP	kW	HP						L	W	H	
								HZ	RPM						mm (in)	L (cu.in)	mm (in)	
WG1605-G-E3	G			4	Naturally Aspirated	19.2	25.7	17.8	23.9	60	1800	79.0 (3.11)	78.4 (3.09)	1.537 (93.79)	566 (22.3)	459 (18.1)	692 (27.2)	122 (269)
WG1605-L-E3	L	√	√			19.0	25.5	17.6	23.6									121 (267)
WG1605-N-E3	N					-	-	16.6	22.2									
WG2503-G-E3	G			4	Naturally Aspirated	28.7	38.5	23.9	32.0	60	1800	88.0 (3.46)	102.4 (4.031)	2.491 (152.0)	646 (25.4)	509 (20.0)	761 (30.0)	195 (430)
WG2503-L-E3	L	√	√			29.7	39.8	24.8	33.2									196 (432)
WG2503-N-E3	N					-	-	24.4	32.7									
WG3800-L-E3	L			4	Naturally Aspirated	-	-	43.8	58.7	60	1800	100.0 (3.937)	120.0 (4.724)	3.769 (230.0)	700 (27.6)	579 (22.8)	799 (31.5)	288 (635)
WG3800-N-E3	N	√	√			-	-	40.7	54.6									


# HOW TO READ YOUR ENGINE MODEL

## 1. MODEL NAME (DIESEL ENGINE)

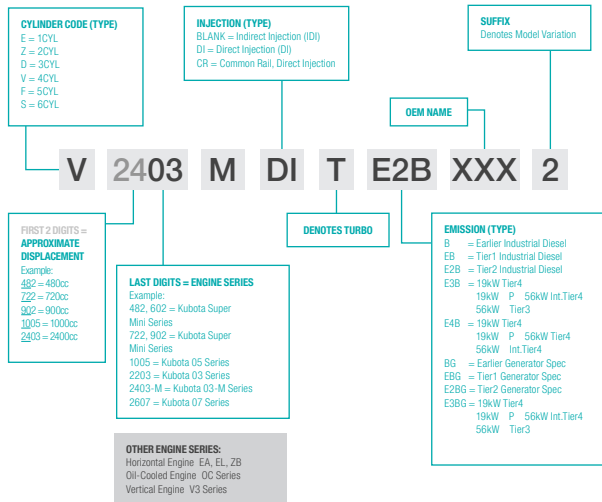

## 2. MODEL NAME (GAS ENGINE)

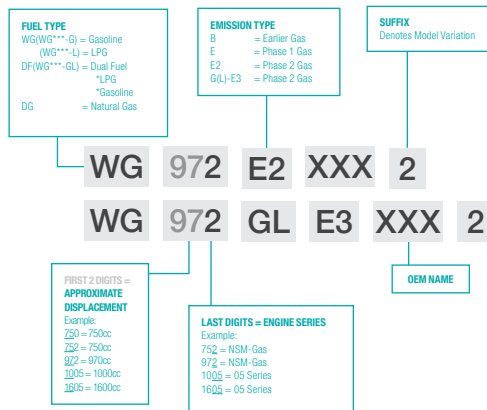

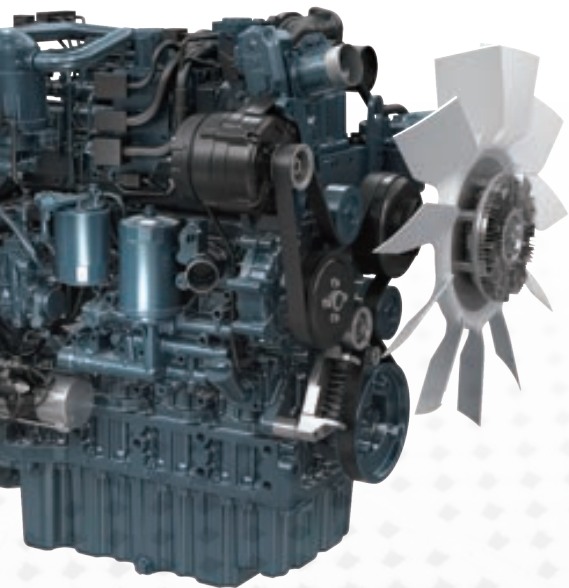

**This is applicable for all sections of the guide unless otherwise specified.**

Specifications are subject to change without notice.

Dimensions and dry weight are according to Kubota's standard specification.

Dimensions and weight depend on completed specifications.

**Gross intermittent:** SAE J1995

**Net intermittent:** SAE J1346

**Net continuous:** SAE J1346

**LxWxH without ATU:** Excludes cooling fan and excludes aftertreatment unit

**LxWxH with ATU:** Excludes cooling fan and includes aftertreatment unit

**Applicable only to Spark Ignited:**

**LPG:** Commercial liquid propane gas only. Equivalent to propane HD-5 of GPA standard.

**Natural gas:** The performance shown is with Japanese standard natural gas.

**The lower heating value:**  
9699 kcal/m<sup>3</sup> (1090 BTU/ft<sup>3</sup>)

## GLOSSARY

**ATU:** Aftertreatment Unit

**BG:** Generator Engine

**CR:** Common Rail

**DOC:** Diesel Oxidation Catalyst

**DPF:** Diesel Particulate Filter

**SCR:** Selective Catalytic Reduction


**I:** Turbo Aftercooler

**G:** Gasoline

**L:** LPG / Propane

**N:** Natural Gas

**CNG:** Compressed Natural Gas



**Kubota**

Kubota Engine America Corp.  
505 Schelter Road  
Lincolnshire, IL 60069

P: 847-955-2500  
F: 847-955-2501  
[www.kubotaengine.com](http://www.kubotaengine.com)